

Roller Blind QS80 Standard



Verosol

Operation

Chain
Motorised

Option

Side Guide Wire
Fascia
Child Safety Device


Features

The basic model of the QS8 system. Main features of this model are the high user comfort, due to the easy and smooth operation and of course the low noise chain control system.

Roller Blind QS80 Standard

| | | |
|----------------------------|--|--|
| Manufacturer | Verosol | |
| System | Max Drop | 5000 mm (depending on fabric) |
| | Max Width | 3000 mm (depending on tube and fabric) |
| | Max Area | 12 m ² (depending on tube and fabric) |
| Roll support bracket | Suitable for top and face fix mounting with slotted holes for precise installation. 1.8 mm thick metal bracket with 40 mm projection. | |
| Idler | Extendable idler pin | |
| Tubes | Extruded aluminium with diameters; Ø44 or Ø49 mm | |
| Operation | Chain | Metal bead chain with low noise operation and lift assisting boosters to balance operation forces. Maximum of 20 N operation force. |
| | Motor | 110 or 230 VAC |
| | | 24 VDC |
| Roll support bracket cover | Plastic (ABS) 65 x 72 mm | |
| Bottom bar | Extruded aluminium | Clear anodised or powder coated. Oval shaped 26 x 20 mm |
| End caps bottom bar | Plastic (ABS) | |
| Optional | Plastic covered steel wire side guiding | |
| | Fascia | Extruded aluminium; height: 82 mm |
| | Child Safety device | |
| Fabric | Description according to selected fabric | |

Roller Blind QS80 Standard

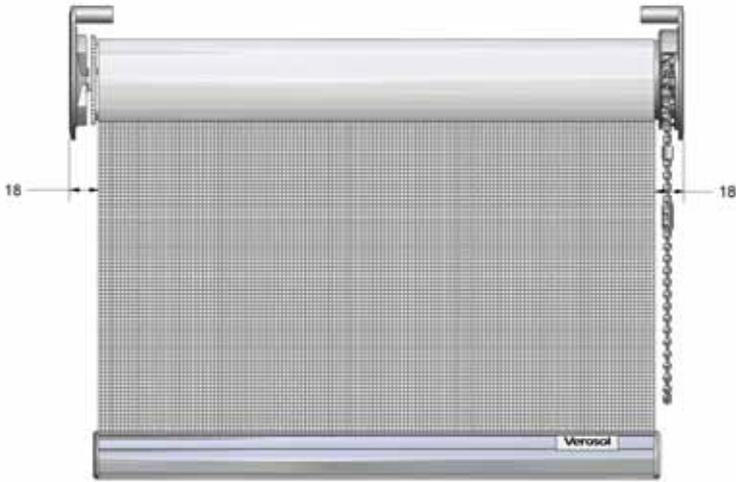

Top Fix



Face Fix



Options: Side Guide Wire



Options: Fascia

