

Rollerblind QS83 Multi Standard

Product information

Of particular interest for wider window conditions is the Multiroller, incorporating special intermediate brackets which can link up to three systems, in a row with only a 20mm light gap between the fabrics. Or link two blinds in an angle up to 90 degrees.



Technical information



Product Code	QS83.0	QS83.4	
Product Name	Multi-Link Roller blind	Multi-Link Roller blind	
Operation	Chain Operation	230V AC Somfy	
Tube Material	Extruded Aluminium ∅ 44mm, 49mm, 57mm	Extruded Aluminium	
Number of sections	Maximum 3 sections		
Dimensions	With	950mm min - 3000mm max (depending on tube and fabric)	600mm min - 3000mm max
	Drop	300mm min - 4000mm max (depending on tube and fabric)	300mm min - 4000mm max
	Maximum Area	18m ² over 3 sections	28m ² over 3 sections
Bottom Rail	Material	Extruded Aluminium Alloy- Asymetric Profile	
	Dimensions	20mm W x 25mm H	
	Colours	RAL 9001, 9010, 9016, Clear Anodised	
	Paint	Electrostatic Powder coated and Baked	
End Caps	Material	UV Stabilised Polymer Acrylic	
	Colours	Grey,White,Black	
Chain	Material	Aluminium or Stainless Steel	
Installation Brackets	Material	Press formed steel, pre-treated and powder coated	
	Operation	Top or Face Fixing - concealed when installed	

Rollerblind QS83 Multi Standard

Optional

Fascia Options	Type	QS8 Fascia	
	Material	Extruded Aluminium Alloy [T5 Temper]	
	Dimensions	84mm x 82mm	Suitable for Face Fixing
	Maximum	4800mm maximum width	
	Colours	RAL 9001, 9010, 9016, Clear Anodised	

System diagrams

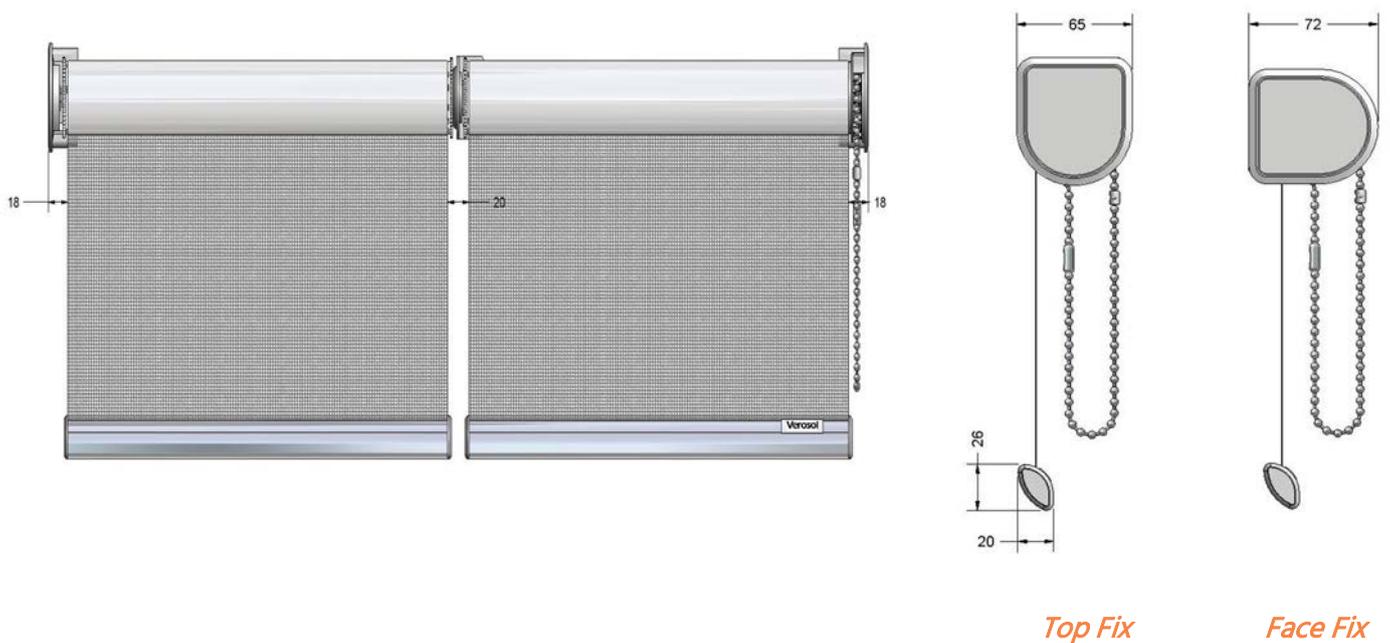

Fascia diameter



Fascia Profile